Assembly Instructions
Chella Wall Light # WCH121

WARNING: BE SURE TO SHUT OFF POWER AT THE MAIN FUSE OR CIRCUIT BREAKER BOX BEFORE INSTALLING OR SERVICING THIS FIXTURE.

NOTE: 1. Before installing, consult local electrical codes for wiring and grounding requirements.
2. READ AND SAVE THIS INSTRUCTION.

Note: Spare crystal drops are enclosed in hardware bag.



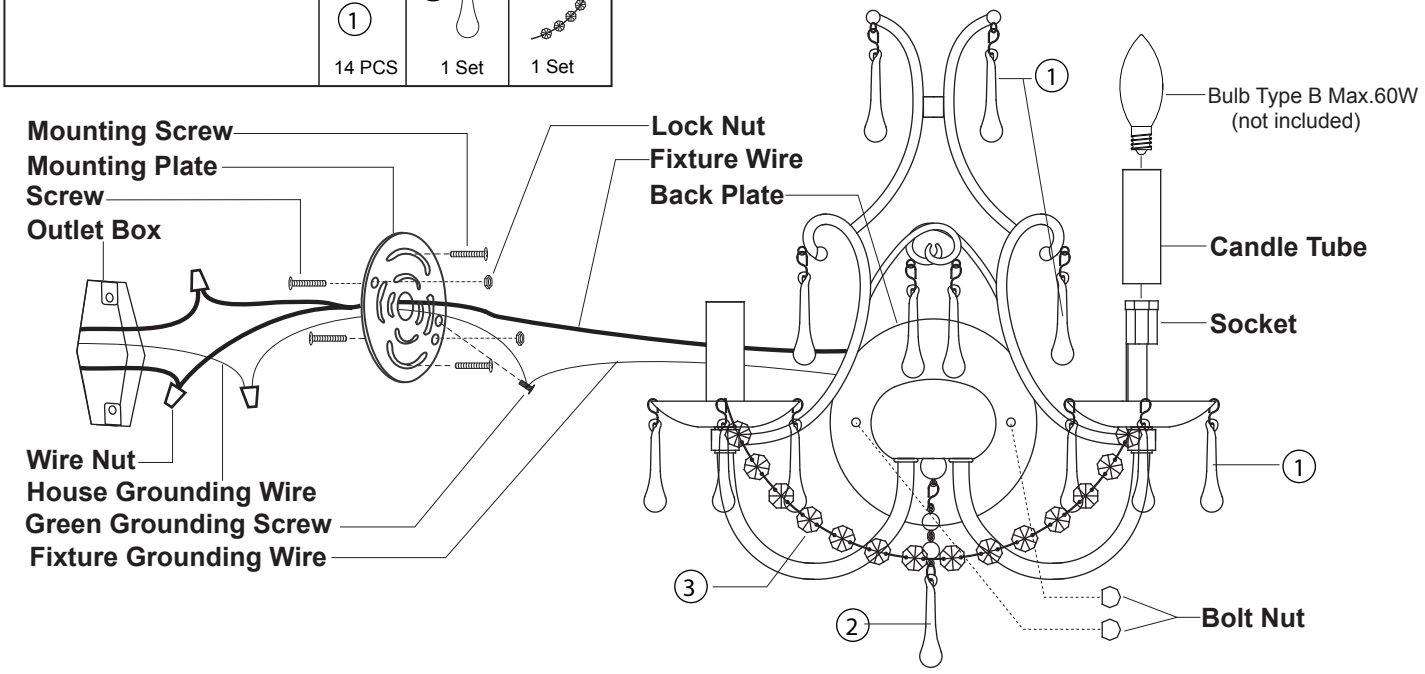

1. Thread two screws through the mounting plate, then secure them with two lock nuts. Adjust the length of the screws if necessary.
2. Attach the mounting plate to the outlet box by using two mounting screws.
3. Pull out the outlet wires and the house grounding wire from the outlet box. Make wire connections using the wire nuts:
   ---Connect the black wire from the fixture to the black wire from the power source.
   ---Connect the white wire from the fixture to the white wire from the power source.
   ---Attach the fixture grounding wire to the mounting plate with the green grounding screw. Then connect it to the house grounding wire with a wire nut.
   Carefully tuck the wires back into the outlet box.
4. Attach the back plate to the mounting plate by inserting the screws, then secure it with two bolt nuts.
5. Attach the candle tubes onto the sockets, then install bulbs (not included). See relamping label at socket area or packaging for maximum allowed wattage.
6. Install the crystal drops and pearl strand as shown in diagram.
   Note: To replace broken crystal drops -Open the pins to remove the crystal drops, hook the new crystal drops, and then close back pins. Avoid bending the pins into sharp angle.
7. Turn on the power at the main fuse or circuit breaker box.